



# Synthetic Blend 2-Cycle Power Equipment Oil

Specialty semi-synthetic, low ash engine oil designed for the demands of modern two cycle engines found in landscaping industry, Champion Power Equipment 2-Cycle Oil provides exceptional performance in the most demanding applications. Designed specifically to protect equipment and maximize the life of engines, exhaust systems and spark plugs and to maximize uptime and productivity.

- Exceeds the JASO FD, ISO-L-EGD, API TC and TISI performance standards
- Exceeds OEM requirements for small 2-cycle gasoline engines
- Outperforms major OEM fluids in spark plug deposit testing
- Exceptional cleanliness and protection of engines, pistons, plugs and exhaust systems
- More than 7% improvement over JASO FD requirements for detergency
- More than 12% improvement over JASO FD requirements for piston cleanliness
- More than 100% improvement over JASO FD requirements for exhaust system cleanliness
- Contains fuel stabilizer to prevent gum formation in stored, pre-mixed fuel
- Convenient sizes premeasured for 1 gallon, 2.5 gallon or 5 gallon fuel oil mixtures (50:1)


This product is not recommended for use in STIHL 4-MIX engines.



PRODUCT MEETING JASO M345  
COMPANY GUARANTEEING THIS FD PERFORMANCE  
CHAMPION BRANDS, LLC

Typical Values	
Viscosity @ 40C, cSt	83.62
Viscosity @ 100C, cSt	11.43
Viscosity Index	128
Sulfated Ash, %wt	0.05
Pour Point, °C	-21
Flash Point, PM, °C	100

## Independent Engine Testing

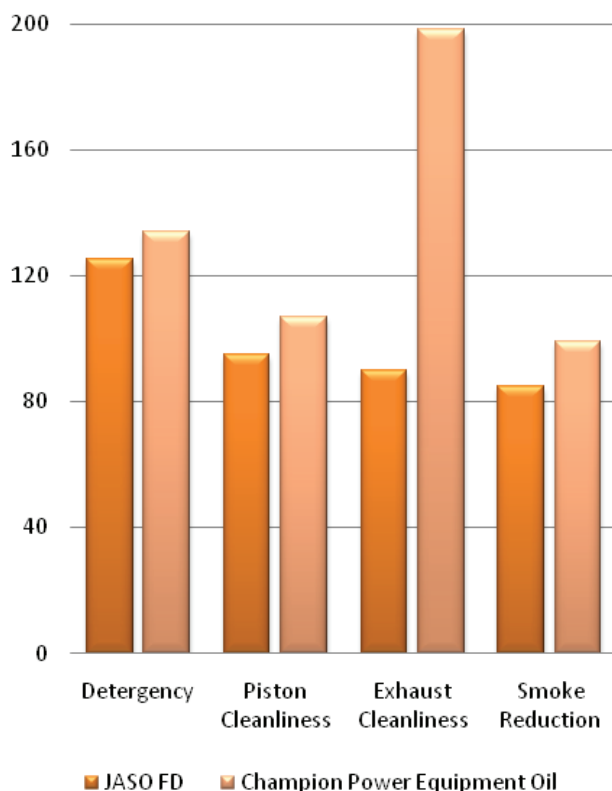

CHAMPION BRANDS, L.L.C. › 1001 GOLDEN DRIVE › CLINTON, MO 64735  
ORDER DESK 800-821-5693